

"Your monitoring specialist"
certified ISO 9001 + ISO 14001



Crimping Line

Micrograph laboratory **Microlab ML 3600-pc**

Tabletop laboratory for cross-section analysis



The Microlab ML 3600-pc with integrated mini pc

The Microlab product family is designed to prepare cross sections of conductor crimps and insulation crimps easily and comfortably within a few minutes. After cutting, polishing and etching of the sample, the image of the cross section can be visualized on the screen. Now a comprehensive quality check of the crimp can be performed by using the special designed image processing software X-Scan.

The **Microlab ML 3600-pc** is the ideal tool to conduct quality tests in a quick and economic way. The proven 4x zoom optic is easy to use and delivers very good digital colour pictures. For the analysis, you use the innovative and comfortable image processing software X-Scan which is already installed ready to use on the integrated mini pc. X-Scan of course fulfills all relevant DIN standards and OEM specifications. Automatically generated records can be used as proofs of quality.

Performance features

- 🔍 **Complete micrograph** laboratory with built-in computer
- 🔍 Excellent optic with **4x zoom objective**
- 🔍 **Superior digital colour camera** USB 3.0 with CMOS sensor and a resolution of 2592x1944 pixels
- 🔍 Well suited for cross sections from **0.1 to 10 mm²** (AWG 28 – AWG 10)
- 🔍 Comfortable analysis **software X-Scan**



C-tec Cable technologies GmbH & Co.KG
Ilztalstraße 11
D-94513 Schoenberg
Tel.: +49 (0) 8554 – 94 23 9-0
Fax: +49 (0) 8554 – 94 23 9-20

eMail: info@cable-tec.net
www.cable-tec.net


Crimping Line



Integrated
mini PC



Front drawer
with keyboard

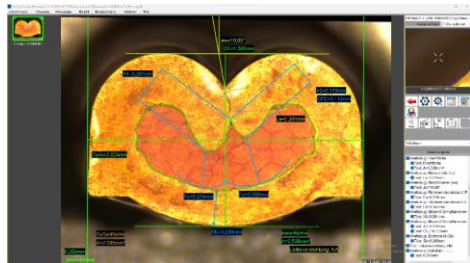

Finished
microsection
with X-Scan

Performance features in detail

- **Complete system** which is ergonomically and functionally integrated in a desktop board laminated with stainless steel
- With **integrated mini-PC**, monitor, mouse, keyboard and license for Windows 11 Pro
- Proven zoom objective with **4 optical zoom grades**
- Suitable especially for small and medium contact sizes **0.1 – 10 mm²**
- Standard terminal holder for **cross sections up to 6 mm²** (further sizes available on request)
- Long-life **LED illumination** at the microscope
- Energy saving **working lamp** for Cutting-/Grinding unit
- Appropriate tool set for the sample preparation
- With comfortable **analysis software X-Scan** installed **ready to use**
- Compact dimensions
- Calibration base with measuring scale incl. calibration certificate
- Cross-sectioning of the sample can be carried out **without any disturbance** of the terminal and cable stranding

Specifications

• Type	ML 3600-pc
• Voltage supply	100 – 240 VAC 50/60 Hz
• Smallest extension (15" monitor)	32x
• Largest extension (15" monitor)	120x
• Smallest crimp height for a full screen	1.8 mm
• Largest crimp height for a full screen	7.0 mm
• Measurement resolution µm per pixel	2.7 µm, 2.1 µm, 1.4 µm, 1.0 µm, 0.8µm, 0.7µm
• Optical zoom grades	0.75 – 1.0 – 1.5 – 2.0 – 2.5 – 3.0
• Camera resolution	2592x1944 pixels
• Camera connection	USB 3.0 port
• Object illumination	Long-life LED ring light for true to colour pictures
• Fine polishing	Electro chemical
• Cross section sizes	0.1mm ² - 10mm ² (AWG 28 – AWG 10)
• Recommended temperature	22°C +/- 5°
• Dimensions (W x D x H)	1200mm x 430mm x 400mm
• Weight	27 kg